



**Installation**

1. Open the chassis and install the I/O shield and DC-DC power cable (color: black/yellow) which you need to take it out of the PSU package.

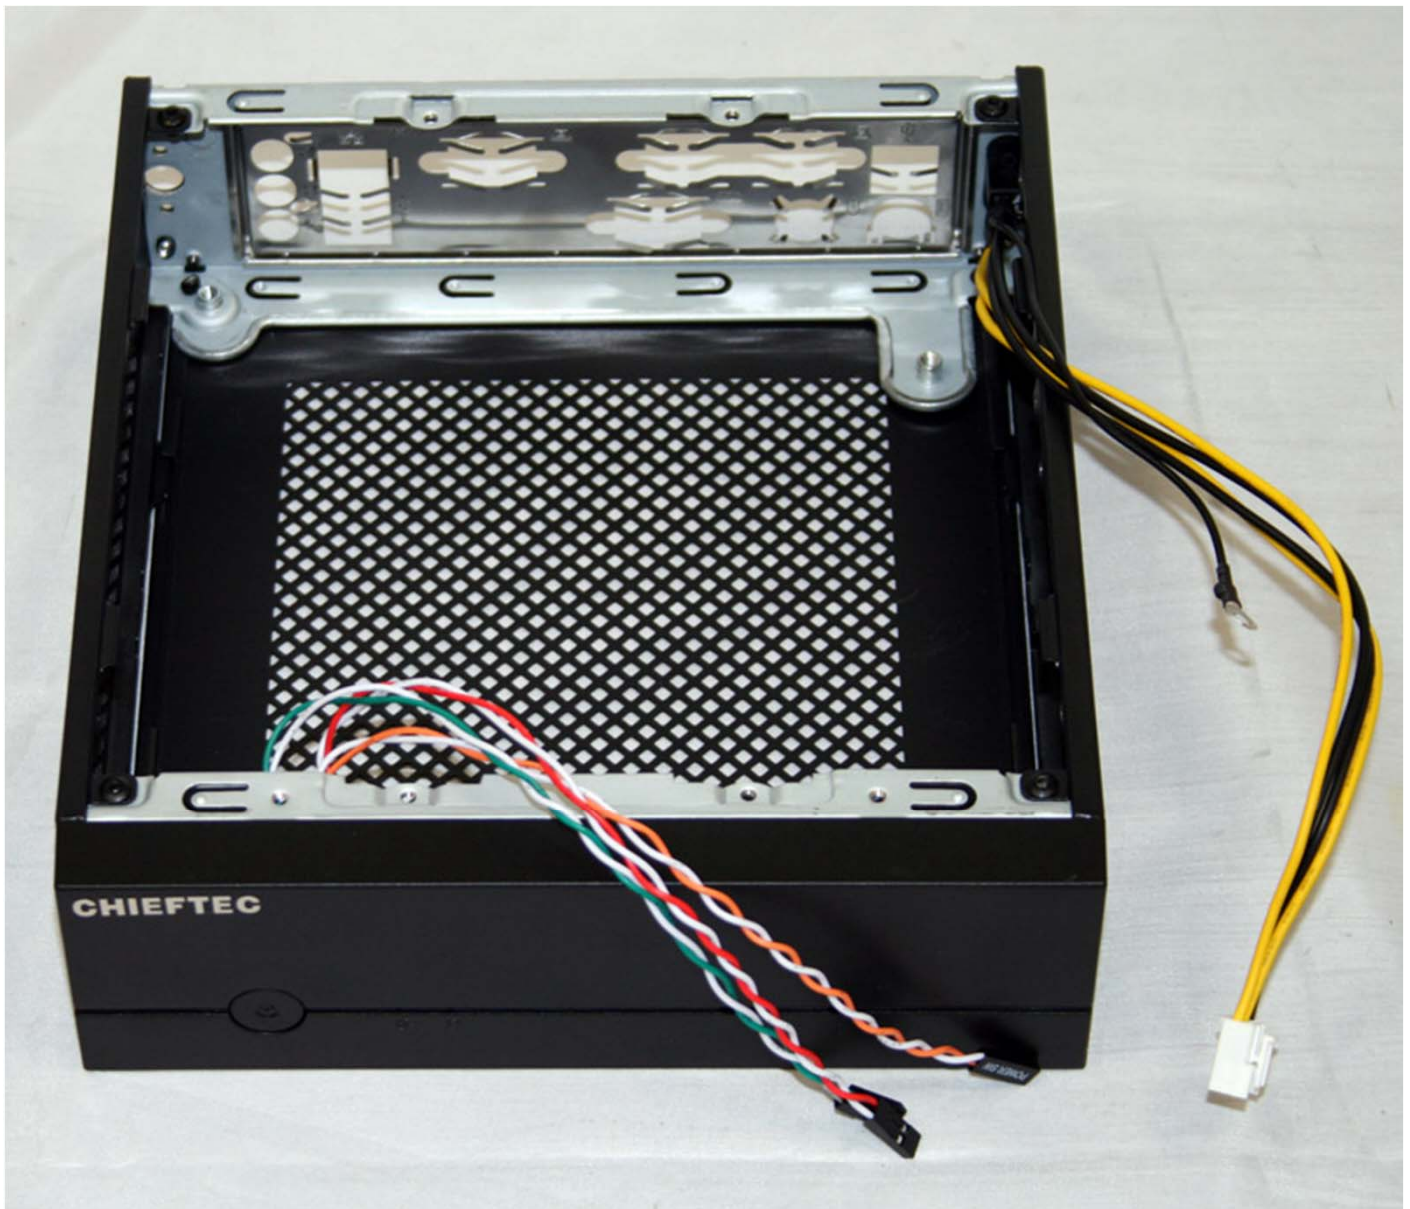

The listed specifications may be altered at any point in time without any pre-notice. Chieftec® is a registered trade mark. All other brands and/or logos are property of the respective owners.


2. Install the mainboard

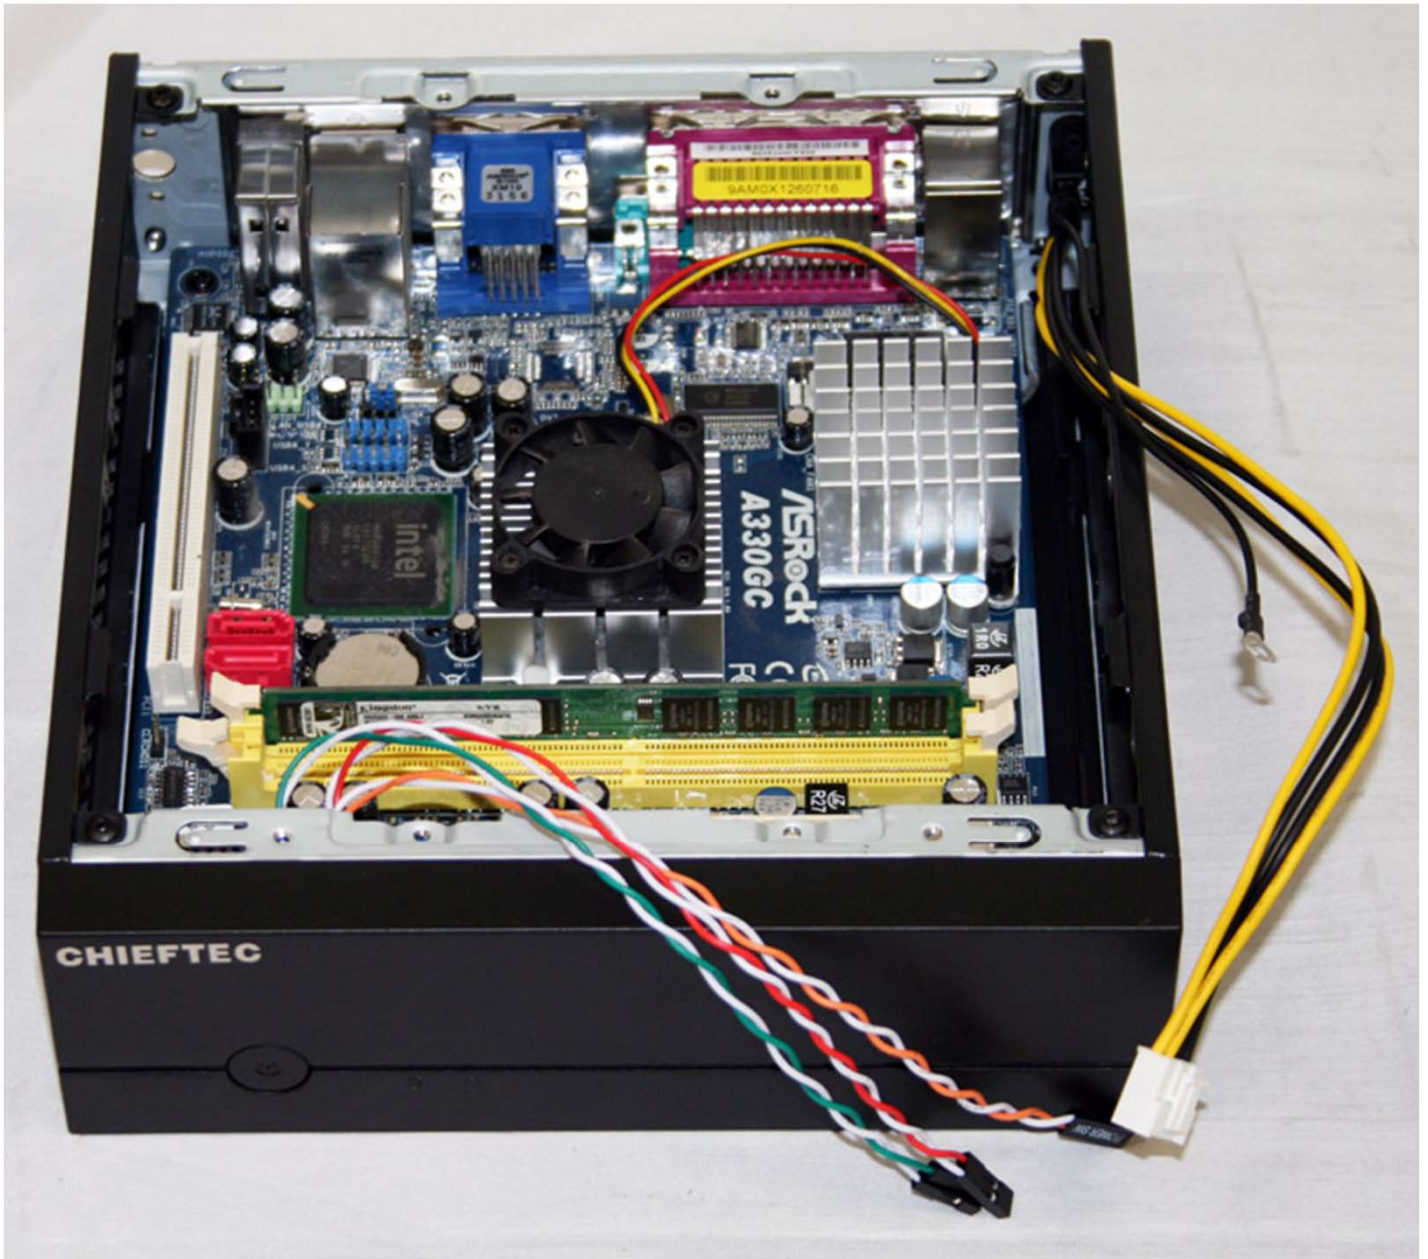

The listed specifications may be altered at any point in time without any pre-notice. Chieftec® is a registered trade mark. All other brands and/or logos are property of the respective owners.



3. Screw two distance holders which can be found in the accessory bag of the chassis

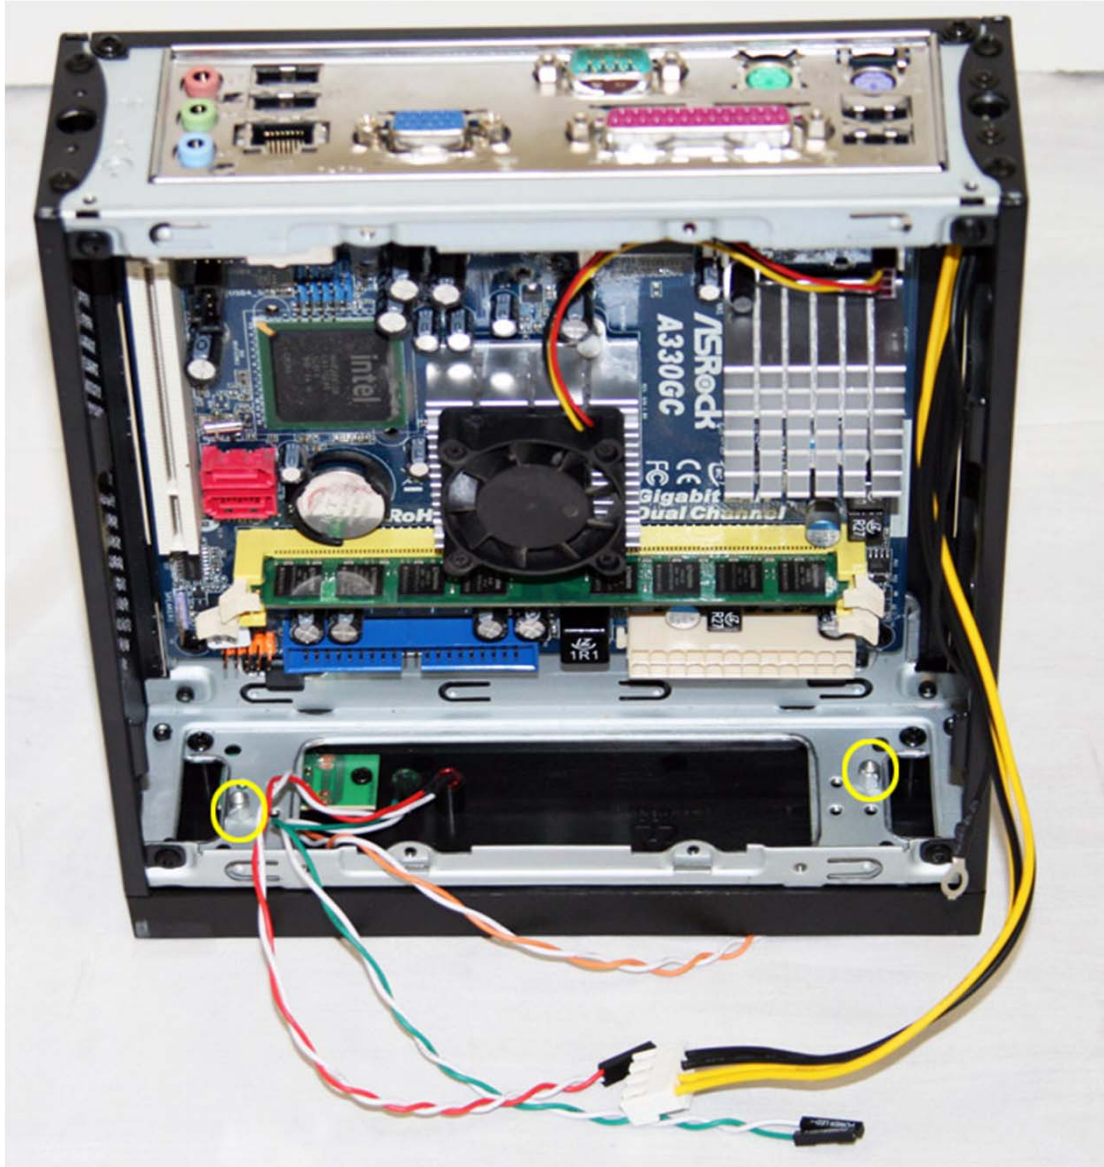

Distance holder for the DC-DC board



The listed specifications may be altered at any point in time without any pre-notice. Chieftec® is a registered trade mark. All other brands and/or logos are property of the respective owners.


4. Screw the DC-DC board on each side. After that please connect the 4PIN DC-DC power cable (color: black/yellow) with the DC-DC board



The listed specifications may be altered at any point in time without any pre-notice. Chieftec® is a registered trade mark. All other brands and/or logos are property of the respective owners.




5. Please connect the DC-DC grounding cable with the mainboard screw.

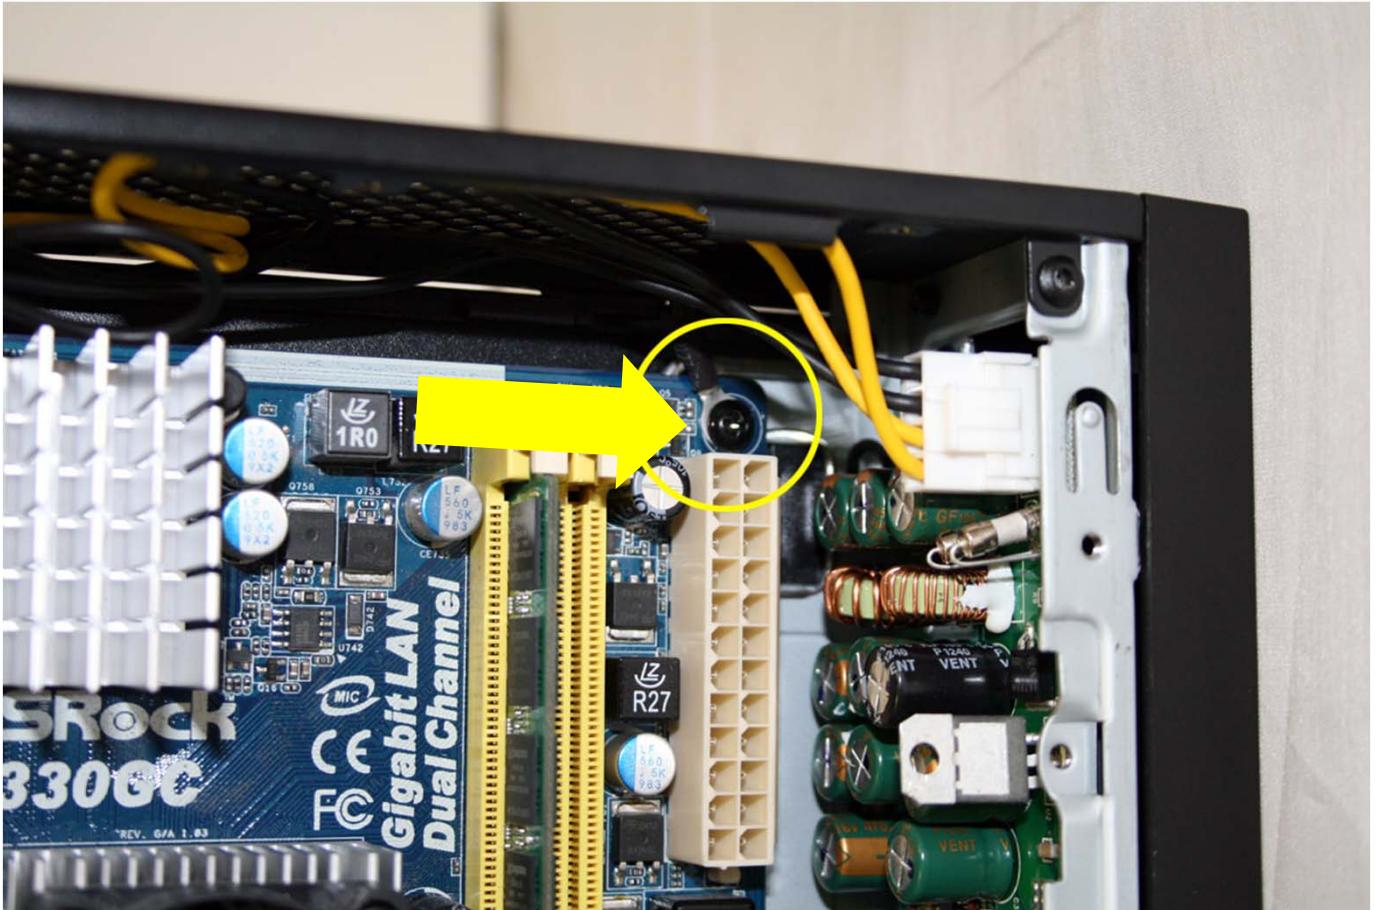

The listed specifications may be altered at any point in time without any pre-notice. Chieftec® is a registered trade mark. All other brands and/or logos are property of the respective owners.

6. Please connect 24PIN power cable with the mainboard & DC-DC board.

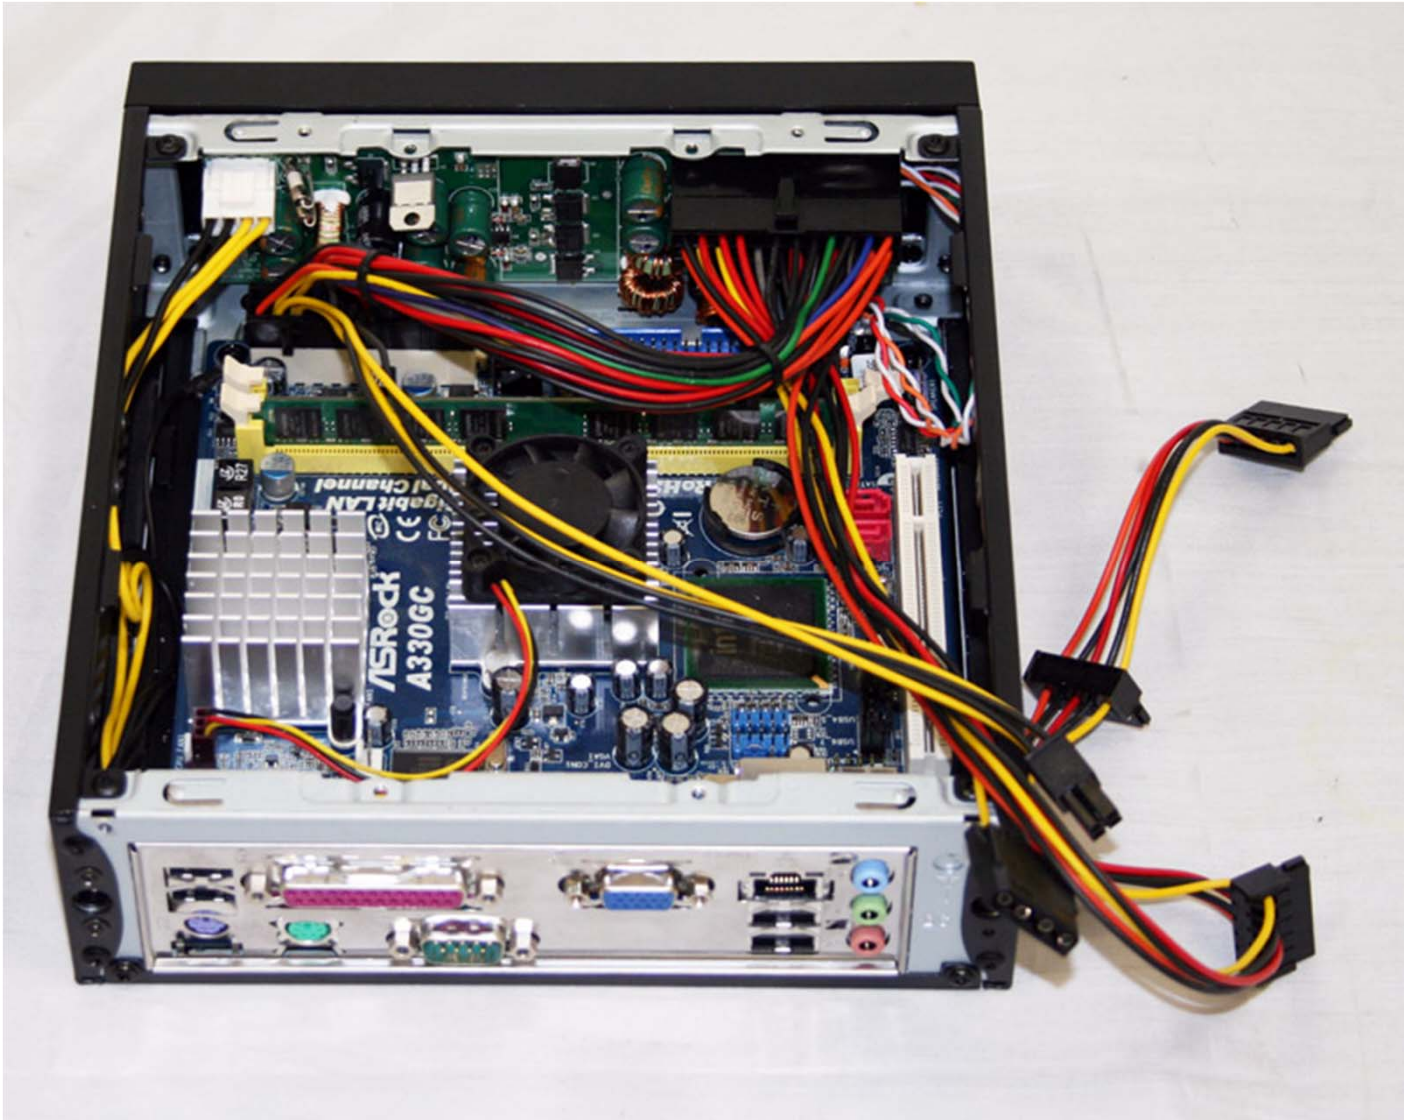

The listed specifications may be altered at any point in time without any pre-notice. Chieftec® is a registered trade mark. All other brands and/or logos are property of the respective owners.



6. Fix the 2,5" HDD with four screws.



The listed specifications may be altered at any point in time without any pre-notice. Chieftec® is a registered trade mark. All other brands and/or logos are property of the respective owners.

6. Connect the SATA HDD power & data cables with the HDD first.  
Mount the HDD holder shown below.



The listed specifications may be altered at any point in time without any pre-notice. Chieftec® is a registered trade mark. All other brands and/or logos are property of the respective owners.



6. Close and screw the chassis. You are done.



**Have fun with your new IX-01B mini ITX chassis from CHIEFTEC!**

The listed specifications may be altered at any point in time without any pre-notice. Chieftec® is a registered trade mark. All other brands and/or logos are property of the respective owners.