



## Aruba Instant On AP12

### Wi-Fi designed with small businesses in mind

Designed for medium density small business environments like medical offices, cafés, restaurants and boutique hotels.

Small businesses are facing a number of challenges due to new and emerging technology, making it pretty overwhelming to keep up.

Mobile devices and cloud-based applications such as Microsoft Office 365 are changing the way you engage with customers, suppliers and staff. Since it's tough enough to set up a new payroll system or choose the most effective point of sale system - we believe choosing the best Wi-Fi solution for your business should be simple.

Whether you own a café or a trendy boutique hotel, your employees and customers are relying on the network for almost everything they do. And because Wi-Fi plays such a crucial role today, you need a purpose-built solution that keeps your business on the go. Aruba Instant On Access Points (APs) are easy to deploy and manage – with a quality look and feel at an attractive price point.

#### KEY FEATURES

Smart Mesh technology

802.11ac Wave 2, 3X3:3 MU-MIMO technology

Remote management and monitoring capability

Separate guest and employee Wi-Fi network

Mobile app and cloud portal

#### HIGHLIGHTS



##### Simplicity at its best

Wi-Fi that works right out of box  
Easy-to-use mobile app for deployment and upkeep




##### Security you can count on

Wi-Fi that keeps business and visitor traffic separate  
WPA2/WPA3 and Enhanced Open for secure network access



##### We've got you covered

Industry leading warranty and support  
A customizable guest access page that shows off your brand

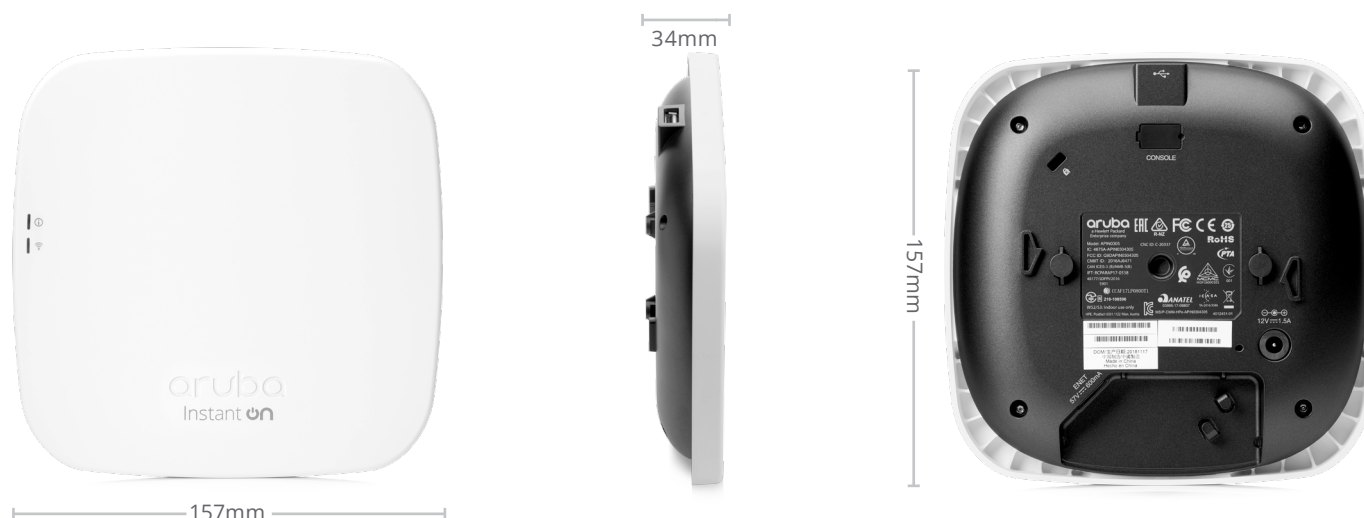

## TECHNICAL SPECIFICATIONS

### IN THE BOX

Aruba Instant On AP12 Indoor Access Point  
 Aruba Instant On AP12 Quick Start guide  
 Ceiling rail mount clip  
 Solid surface mount clip  
 Ethernet Cable

### RADIOS

Dual Radio for simultaneous dual-band operation  
 5 GHz 802.11ac 3x3 MIMO for up to 1,300 Mbps wireless data rate, with Multi User MIMO support (Wi-Fi 5)  
 2.4 GHz 802.11n 2x2 MIMO for up to 300 Mbps wireless data rate (Wi-Fi 4)

### INTERFACES

Uplink Gigabit Ethernet port, with POE-in support (802.3af)  
 DC power connector (12V)  
 USB host interface (future use)  
 Bluetooth Low Energy (BLE) radio  
 LED status indicators (2)  
 Reset/LED control button  
 Kensington security slot

### PHYSICAL SPECIFICATIONS

157mm x 157mm x 34mm, excluding mount accessories

Weight: 483g

### POWER

Power over Ethernet (POE): 802.3af (class 3)

DC power (12V)

Note: Power sources are sold separately

### ANTENNAS

Integrated downtilt omni-directional antennas with maximum individual antenna gain of 3.9dBi in 2.4GHz and 5.4dBi in 5GHz

### MOUNTING

The access point ships with a (black) mount clip to attach to suspended ceiling rails, and a (white) mount clip to attach to solid surfaces (wall/ceiling)

### ENVIRONMENTAL & RELIABILITY

Operating Temperature: 0° C to +50° C (+32° F to +122° F)

Humidity: 5% to 93% non-condensing

MTBF: 1,116khrs (127yrs) at +25° C

### INDUSTRY CERTIFICATIONS

UL 2043 plenum rating

EN 60601-1-1 and EN 60601-1-2 (for deployment in medical environments)

Wi-Fi Alliance certified (WFA) 802.11ac with Wave 2 (Wi-Fi 5), WPA2, WPA3, Enhanced Open (OWE)

### MANAGEMENT OPTIONS

Instant On mobile application (Android & iOS)

Cloud Portal: [Portal.ArubaInstantOn.com](https://portal.aruba.com)

### WARRANTY & SUPPORT

Aruba Instant On 1 Year warranty with 24X7 phone support for first 90 days and chat support for the entire warranty period. Community support as long as you own the products

## ORDERING INFORMATION

## Aruba Instant On Indoor AP12 Access Points

Part Number Points	Description	Comments
R2X00A	Aruba Instant On AP12 (US) 3X3 11ac Wave2 Indoor Access Point	Add PoE or DC Power Source
R2X01A	Aruba Instant On AP12 (RW) 3X3 11ac Wave2 Indoor Access Point	Add PoE or DC Power Source
R2X02A	Aruba Instant On AP12 (IL) 3X3 11ac Wave2 Indoor Access Point	Add PoE or DC Power Source
R2X03A	Aruba Instant On AP12 (EG) 3X3 11ac Wave2 Indoor Access Point	Add PoE or DC Power Source
R2X04A	Aruba Instant On AP12 (JP) 3X3 11ac Wave2 Indoor Access Point	Add PoE or DC Power Source
R3J23A	Aruba Instant On AP12 (US) Indoor AP with DC Power Adapter and Cord (NA)	
R3J24A	Aruba Instant On AP12 (RW) Indoor AP with DC Power Adapter and Cord (EU) Bundle	
<b>Power Options</b>		
R2X20A	Aruba Instant On 12V/30W Power Adaptor	Add AC power cord
R2X22A	Aruba Instant On 15.4W 802.3af PoE Midspan Injector	Add AC power cord
<b>Power Options Continued Add 3-prong (C13) AC power cord for Power Adaptor/PoE Injector</b>		
JW113A	PC-AC-ARG Argentina AC power cord (C13,2m)	
JW114A	PC-AC-AUS Australia AC power cord (C13, 2m)	
JW115A	PC-AC-BR Brazil AC power cord (C13, 2m)	
JW116A	PC-AC-ARG Argentina AC power cord(C13, 2m)	
JW117A	PC-AC-CHN China AC power cord (C13, 2m)	
JW118A	PC-AC-DEN Denmark AC power cord (C13, 2m)	
JW119A	PC-AC-EC Europe AC power cord (C13, 2m)	
JW120A	PC-AC-IN India AC power cord (C13, 2m)	
JW121A	PC-AC-IL Israel AC power cord (C13, 2m)	
JW122A	PC-AC-IT Italy AC power cord (C13, 2m)	
JW123A	PC-AC-JPN Japan AC power cord (C13, 2m)	
JW124A	PC-AC-KOR Korea AC power cord (C13, 2m)	
JW125A	PC-AC-NA North America AC power cord (C13, 2m)	
JW126A	PC-AC-SWI Switzerland AC power cord (C13, 2m)	
JW127A	PC-AC-TW Taiwan AC power cord (C13, 2m)	
JW128A	PC-AC-UK United Kingdom AC power cord (C13, 2m)	
JW129A	PC-AC-ZA South Africa AC power cord (C13, 2m)	
<b>Mount Kits – Spares</b>		
JW044A	Instant On AP Ceiling Rail Mount Kit	Spare for what ships with AP12
Q9U25A	Instant On AP Low Profile Basic Mount Kit	Spare for what ships with AP12

[ArubaInstantOn.com](http://ArubaInstantOn.com) · [ArubaInstantOn.com/support](http://ArubaInstantOn.com/support) · [Community.ArubaInstantOn.com](http://Community.ArubaInstantOn.com)

© Copyright 2019 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

DS\_AIO\_AP12\_060519 a00067766enw